


LIGHTEST, STRONGEST, SMARTEST

9 SUB BOTTOM PROFILER WINCH

SPECIFICATIONS

PARAMETER	VALUE
Electrical Supply	30 kW (380 or 440V/3/50 or 60Hz)
SWL :	2500 kg @ 0.85 m/s [bare drum] 1400 kg @ 1.5 m/s [full drum]
Particulars	6000 m capacity of 11.43 mm EM cable 26 layers on 25" drum 7350 kg brake capacity
Slip ring	Focal model 180 (3" bore)
Overall Dimensions	2.0m x 2.7m x 2.0m [L x W x H]

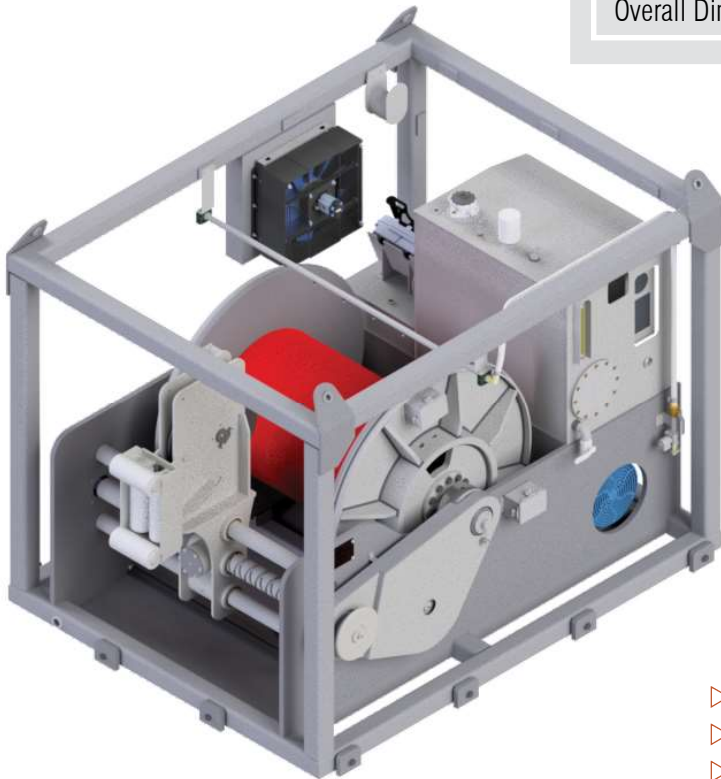

- ▷ Self contained unit with onboard HPU and controls
- ▷ Metered sheave for speed and payout
- ▷ Dual axis load pin
- ▷ Machined drum and flanges with grooved Lebus shell
- ▷ Wired pendant HMI operator console
- ▷ Failsafe brake